

E-A-R™ Flexible Fit Earplug Earplugs

Technical Data Sheet



Product Description

The 3M™ E-A-R™ Flexible Fit Earplugs are designed for insertion into the ear canal to help reduce exposure to hazardous levels of noise and loud sound.

These earplugs are available in corded and uncorded version. When properly selected and worn according to the User Instructions, they may be used for protection against high noise environments, providing effective protection across all test frequencies.

Features


- Washable and reusable, suggested use for up to 2 weeks when following wash and care instructions (see cleaning & maintenance)
- Foam encapsulated design means total earplug (stem and tip) are made with 3M patented washable foam
- Foam is resilient, predominantly closed cell TPE, which is water resistant
- The conical shape of the earplug along with the soft conforming foam helps provide a snug and comfortable fit
- No roll-down required helps keep the earplugs clean during fitting
- Firm yet flexible fitting stem and no foam roll-down means earplugs can be inserted and removed easily, even when wearing gloves
- Attenuation data available for both two hand insertion (SLC80 20dB) and one hand insertion (SLC80 16dB) – see full attenuation table
- Compatible with the 3M™ E-A-Rfit™ Dual-Ear Validation System
- 3M™ E-A-R™ Flexible Fit Earplug – corded (328-1001) and uncorded (328-1000)

Applications

Applications

The E-A-R™ Flexible Fit earplugs are ideally suited to provide protection against most noise frequencies in a wide range of industrial workplace and leisure environment. Examples of typical applications include:

- Automotive
- Chemical & pharmaceutical manufacture
- Construction
- Heavy engineering
- Metal processing
- Textile manufacture
- Woodworking

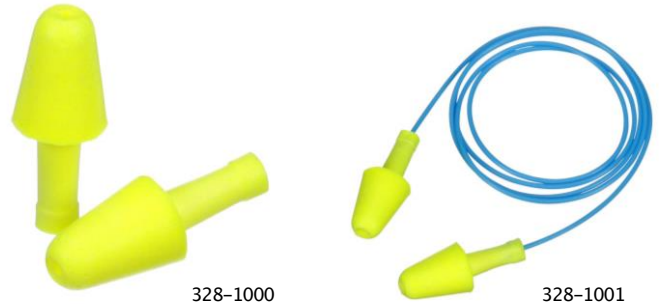

Ordering Information

Product Code	3M ID	Description
328-1000	70071732245	Flexible Fit Uncorded Earplug
328-1001	70071732278	Flexible Fit Corded Earplug
393-2026-50	70071732690	EARfit Test Probe for Flexible Fit

Standards

These hearing protectors have been produced to comply with the requirements of the Australian / New Zealand Standard AS/NZS 1270:2002 under an agreed production certification scheme operated during manufacture in accordance with the SAI Global Standards Mark program.

Cleaning & Maintenance

These earplugs can be gently washed with a mild detergent and warm water, as necessary. Rinse with clean water and allow earplugs to dry at room temperature. Do not clean with solvents such as alcohols or acetone, or with waterless hand cleaners or products containing lanolin. Do not use heat to dry the product.



E-A-R™ Flexible Fit Earplug Earplugs

Fitting Instructions


Earplugs should be clean before use. Use either the One-Hand Method (less noise reduction) or the Two-Hand Method (more noise reduction) to insert the earplug into your ear. Consult your supervisor to determine which method to use to provide the necessary level of protection for your noise exposure.

One-Hand Method

1. INSERT rounded ear tip into ear canal while holding stem with thumb and finger. (Fig. 1)
2. HOLD PRESSURE on stem for a few seconds WHILE INSERTING. If needed, push stem from a different direction to make insertion easier. (Fig. 2)
3. The entire ear tip should be inside the ear canal.

Two-Hand Method

1. INSERT rounded ear tip into ear canal WHILE PULLING ear outward and upward with opposite hand. (Fig. 3)
2. HOLD PRESSURE on stem for a few seconds WHILE INSERTING. If needed, push stem from a different direction to make insertion easier. (Fig. 4)
3. The entire ear tip should be inside the ear canal.

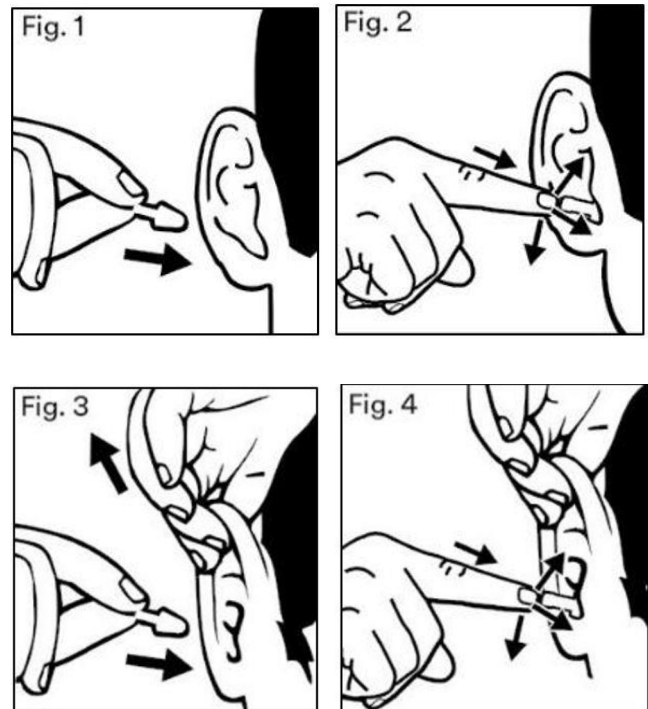

Laboratory Attenuation Tables

One Hand Insertion Method

Class 2	SLC80 16dB						
Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	21.0	17.1	20.2	22.8	29.7	32.5	31.5
Standard Deviation (dB)	12.9	11.5	11.8	9.7	7.3	9.3	11.0
Assumed Protection Value (dB)	8.1	5.6	8.4	13.1	22.4	23.2	20.5

Two-Hand Insertion Method

Class 3	SLC80 20dB						
Frequency (Hz)	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	23.4	20.0	22.2	24.5	31.7	33.6	33.7
Standard Deviation (dB)	10.6	9.1	9.6	7.5	6.2	7.3	9.9
Assumed Protection Value (dB)	12.8	10.9	12.6	17.0	25.5	26.3	23.8



3M Australia Pty Ltd
Personal Safety Division
Bldg A, 1 Rivett Road
North Ryde NSW 2113
TechAssist Helpline: 1800 024 464
Customer Service: 1300 363 565
Email: techassist@mmm.com
Web: www.3M.com/au/ppesafety

3M New Zealand Ltd
Personal Safety Division
94 Apollo Drive, Rosedale
Auckland 0632
TechAssist Helpline: 0800 364 357
Customer Service: 0800 252 627
Email: techassist@mmm.com
Web: www.3M.com/nz/ppesafety

WARNING! Hearing Protection Products*
These hearing protectors help reduce exposure to hazardous noise and other loud sounds. Misuse or failure to wear hearing protectors at all times that you are exposed to noise may result in hearing loss or injury. For proper use, see supervisor, user instructions, or call 3M TechAssist Helpline 1800 024 464.

Please feel free to enquire with Kieran or Adel at
Adept Industrial Solutions on 1800 008 590.



Freecall: 1800 008 590
www.adept-industrial.com.au
sales@adept-industrial.com.au