

**With all of the options, how do you pick the right industrial masking tape for your job?**


Length, width, colour, thickness, adhesion, strength: when it comes to industrial masking tapes, the options are almost endless. We know it can be overwhelming to understand the differences between them - and the impact they will have on your job.

**That's why we've  
made masking  
simple.**



# 5

**Five tapes.  
Five colours.  
Five levels  
of performance.**

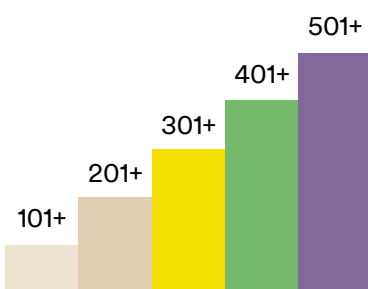

We have refined a broad range of industrial masking needs into a single line of easy-to-choose tapes. Ranging from 101+ to 501+, each product level offers an increasing level of performance – from basic, everyday jobs to specialised, demanding applications.

From the Inventors of  
**Masking Tape**



**Since 1925.**

We invented masking tape almost a century ago. In the time since, we have continued to evolve the technology in our products based on your needs. Today we're proud to help you explore new and better ideas.



**3M™  
Value  
Masking Tape**

**101+**

**3M™  
General Use  
Masking Tape**

**201+**

**3M™  
Performance  
Yellow Masking  
Tape**

**301+**

**3M™  
High  
Performance  
Green Masking  
Tape**

**401+**

**3M™  
Specialty High  
Temperature  
Masking Tape**

**501+**

**For light duties  
you don't take  
lightly.**

**For everyday  
jobs that need  
some extra  
gusto.**

**For jobs between  
tough and typical.**

**For paint jobs  
worth envying.**

**For paint jobs  
that demand  
royal treatment.**

Use our lightest colour for your lightest jobs. This tape is ideal for indoor, light-duty applications like marking, temporary holding, and wrapping.






This tape is a little darker and a little stronger. Use it for indoor, light-to-medium duty applications, like bundling, labeling and identifying.

This tape is designed for tasks that are somewhere in the middle. Use it for paint masking in temperatures up to 107°C for 30 minutes, as well as industrial strength bundling, holding and colour coding.

Use this tape to create super sharp paint lines – even for two-tone colour applications. It sticks confidently, resists bleed-through, and removes cleanly, in temperatures up to 121°C for 30 minutes.

Use this tape for high temperature paint baking, fascia painting, and pipe coating applications in temperatures up to 149°C for 30 minutes. It is designed to stick confidently, resist bleed-through and remove cleanly for your most complex composites, under your most critical conditions.

# Find your industrial masking tape.

	101+	201+	301+	401+	501+
 <b>JOB DUTY</b>	 Light	 Light - Medium	 Medium	 Heavy	 Heavy
 <b>PAINT</b>	 No	 No	 Yes	 Yes	 Yes
 <b>TEMPERATURE</b>	 Low 66°C	 Low 93°C	 Moderate 107°C	 High 121°C	 High 149°C
 <b>COMPATIBILITY</b>	 Low	 Fair	 Good	 Excellent	 Best
 <b>BEST SURFACE</b>	 Marking, Wrapping, temporary holding	 Bundling, Labeling, identifying	 Paint masking, bundling, holding, colour coding	 High performance paint masking, including two tone paint	 High temperature paint baking, fascia painting and pipe coating applications

Learn how we've made masking simple,  
[www.maskingmadesimpleglobal.com](http://www.maskingmadesimpleglobal.com)



**3M Australia Pty Ltd**  
**Industrial Adhesives and Tapes Division**  
 Bldg A, 1 Rivett Road  
 North Ryde NSW 2113

Phone 136 136 (Option 2)  
 Email [3mindustrialau@mmm.com](mailto:3mindustrialau@mmm.com)  
 Web [www.3m.com.au/maskingmadesimple](http://www.3m.com.au/maskingmadesimple)

**3M New Zealand Ltd**  
**Industrial Adhesives and Tapes Division**  
 94 Apollo Drive, Rosedale  
 Auckland 0632

Phone 09 477 4040  
 Email [3mzntb@mmm.com](mailto:3mzntb@mmm.com)  
 Web [www.3m.co.nz/maskingmadesimple](http://www.3m.co.nz/maskingmadesimple)

3M is a trademark of 3M Company.  
 Please recycle. Printed in Australia.  
 © 3M 2016. All rights reserved.  
 AV011456074